FB9802 | Fan and Filter






FB9802.230



FB9802.300


Product Information


Material: ABS
Flammability Rating: UL94 V-0
Protection Class: IP54
Filter Mat Class: G3




Dimension Drawing

Fan Compatible:92X92mm




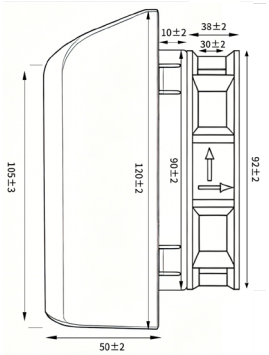

Cutout Dimension



Power Characteristic Curve

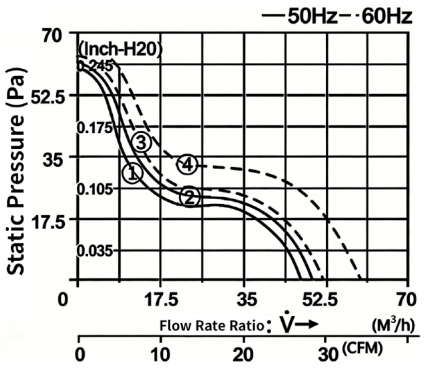


Technical Parameters	FB9802.230	FB9802.115
Axial Fan	ZR-92B-230	ZR-92B-115
Rated Voltage (V)	AC 230	AC 115
Rated Frequency (Hz)	50/60	
Air Flow, Free Blow	28/38m³/h	
Air Flow, with Outlet Filter	1xFB9802.300：15/19m³/h	
Axial Fan	Self-starting Shaded-pole Motor	
Rated Current (A)	0.09/0.08	
Power (W)	13/12	
Noise Level (dB)	28/32	
Operating Temperature Range	-10°C~+60°C	
Order Code	105641	105651
Outlet Filter Model	FB9802.300 (20601110)	

FB9803 | Fan and Filter




Product Information


Material: ABS
Flammability Rating: UL94 V-0
Protection Class: IP54
Filter Mat Class: G3



Dimension Drawing

Fan Compatible:120x120








FB9803.230




FB9803.300

Cutout Dimension



Power Characteristic Curve

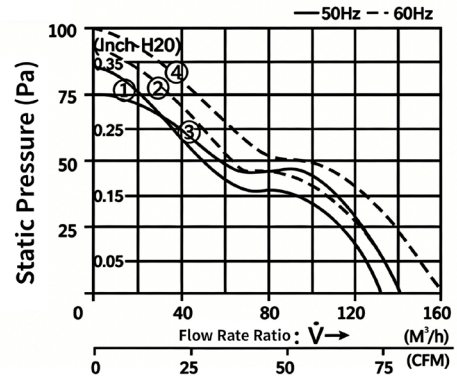


Technical Parameters	FB9803.230	FB9803.115
Axial Fan	ZR-120B-230	ZR-120B-115
Rated Voltage (V)	AC 230	AC 115
Rated Frequency (Hz)	50/60	
Air Flow, Free Blow	105/120m³/h	
Air Flow, with Outlet Filter	1xFB9803.300:48/56m³/h 2xFB9803.300:58/67m³/h	
Axial Fan	Self-starting Shaded-pole Motor	
Rated Current (A)	0.12/0.10	0.24/0.23
Power (W)	19/14	18/15
Noise Level (dB)	43/50	
Operating Temperature Range	-10°C~+60°C	
Order Code	105660	105670
Outlet Filter Model	FB9803.300 (20601111)	

FB9804 | Fan and Filter




Product Information


Material: ABS
Flammability Rating: UL94 V-0
Protection Class: IP54
Filter Mat Class: G3



Dimension Drawing


Fan Compatible:120x120/150x150/172x152/172x150








FB9804.230




FB9804.300

Cutout Dimension



Power Characteristic Curve

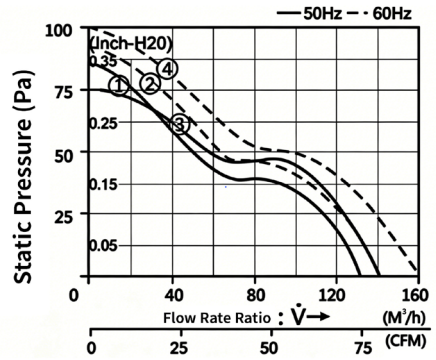


Technical Parameters	FB9804.230		FB9804.115	
Axial Fan	ZR-120B-230	ZR-172B-230	ZR-120B-115	ZR-172B-115
Rated Voltage (V)	AC 230		AC 115	
Rated Frequency (Hz)	50/60			
Air Flow, Free Blow	120/128m³/h			
Air Flow, with Outlet Filter	1xFB9804.300:48/56m³/h 2xFB9804.300:58/67m³/h			
Axial Fan	Self-starting Shaded-pole Motor			
Rated Current (A)	0.12/0.10	0.25	0.24/0.23	0.50
Power (W)	10/14	36	19/15	36
Noise Level (dB)	43/50	58	43/50	58
Operating Temperature Range	-10°C~+60°C			
Order Code	105681	105684	105691	105694
Outlet Filter Model	FB9804.300 (20601112)			

FB9805 | Fan and Filter



Product Information

Material: ABS
Flammability Rating: UL94 V-0
Protection Class: IP54
Filter Mat Class: G3





Dimension Drawing

Fan Compatible:150x150/172x150/172x152/180x180/200x200/220x220




FB9805.230






Cutout Dimension



Power Characteristic Curve

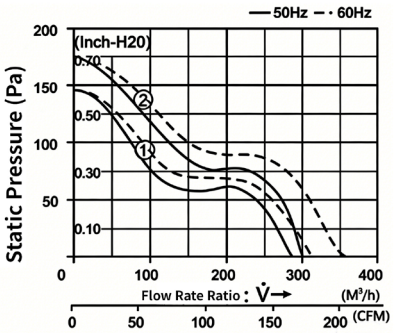



FB9805.300


Technical Parameters	FB9805.230		FB9805.115	
Axial Fan	ZR-150B-230	ZR-220B-230	ZR-150B-115	ZR-220B-115
Rated Voltage (V)	AC 230		AC 115	
Rated Frequency (Hz)	50/60			
Air Flow, Free Blow	190/220m³/h			
Air Flow, with Outlet Filter	1xFB9805.300：175/139³/h 2xFB9805.300：142/160m³/h			
Axial Fan	Self-starting Shaded-pole Motor			
Rated Current (A)	0.25	0.25	0.50	0.90
Power (W)	36	65	36	65
Noise Level (dB)	58/65			
Operating Temperature Range	-10°C~+60°C			
Order Code	105700	105705	105710	105715
Outlet Filter Model	FB9805.300 (20601113)			

FB9806 | Fan and Filter




Product Information


Material: ABS
Flammability Rating: UL94 V-0
Protection Class: IP54
Filter Mat Class: G3



Dimension Drawing


Fan Compatible:172x150/172x152/200x200/220x60/225x225/280x280








FB9806.230




FB9806.300

Cutout Dimension



Power Characteristic Curve

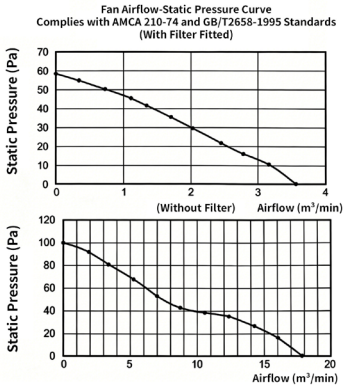

Technical Parameters	FB9806.230		FB9806.115	
Axial Fan	ZR-172B-230	ZR-280B-230	ZR-172B-115	ZR-280B-115
Rated Voltage (V)	AC 230		AC 115	
Rated Frequency (Hz)	50/60			
Air Flow, Free Blow	960/1020m³/h			
Air Flow, with Outlet Filter	1xFB9806.300:502/533m³/h 2xFB9806.300:582/618m³/h			
Axial Fan	Self-starting Shaded-pole Motor			
Rated Current (A)	0.25/0.23	0.25	0.50	0.90
Power (W)	35/38	65	36	65
Noise Level (dB)	59/68			
Operating Temperature Range	-10°C~+60°C			
Order Code	105720	105725	105730	105735
Outlet Filter Model	FB9806.300 (20601114)			