FK3321 | Fan and Filter






FK3321.230



FK3321.300


Product Information


Material: ABS
Flammability Rating: UL94 V-0
Protection Class: IP54
Filter Mat Class: G3




Dimension Drawing

Fan Compatible:92X92mm




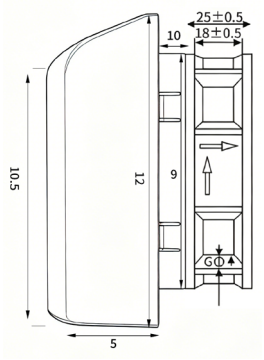

Cutout Dimension

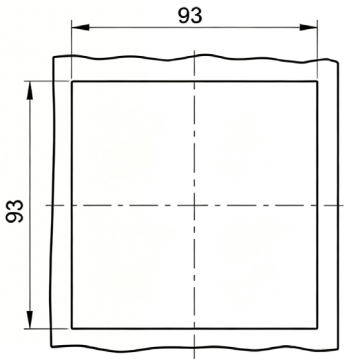

Power Characteristic Curve

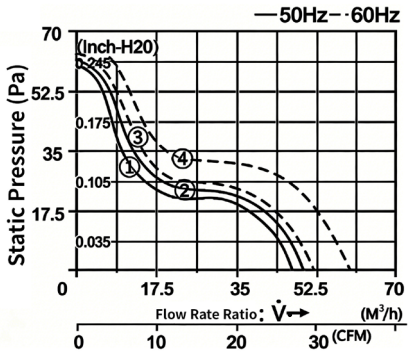


Technical Parameters	FK3321.230	FK3321.115
Axial Fan	ZR-92B-230	ZR-92B-115
Rated Voltage (V)	AC 230	AC 115
Rated Frequency (Hz)	50/60	
Air Flow, Free Blow	20/25m³/h	
Air Flow, with Outlet Filter	1xFK3321.300：10/12m³/h	
Axial Fan	Self-starting Shaded-pole Motor	
Rated Current (A)	0.07/0.06	0.12/0.10
Power (W)	11/13	
Noise Level (dB)	36/38	
Operating Temperature Range	-10°C~+60°C	
Order Code	105740	105750
Outlet Filter Model	FK3321.300 (20601120)	

FK3322 | Fan and Filter




Product Information


Material: ABS
Flammability Rating: UL94 V-0
Protection Class: IP54
Filter Mat Class: G3



Dimension Drawing

Fan Compatible:120x120mm



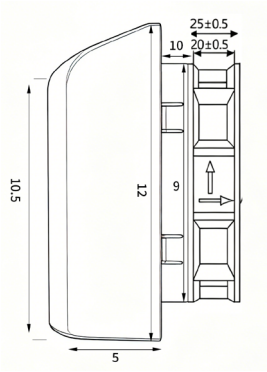




FK3322.230




FK3322.300

Cutout Dimension

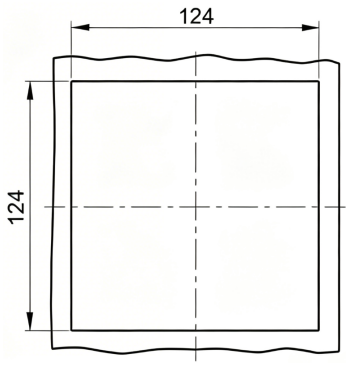

Power Characteristic Curve

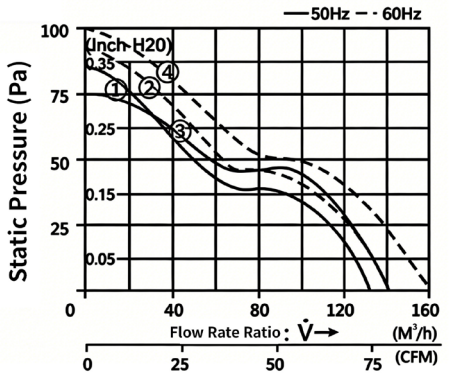

Technical Parameters	FK3322.230	FK3322.115
Axial Fan	ZR-120B-230	ZR-120B-115
Rated Voltage (V)	AC 230	AC 115
Rated Frequency (Hz)	50/60	
Air Flow, Free Blow	55/56m³/h	
Air Flow, with Outlet Filter	1xFK3322.300:30/34m³/h	
Axial Fan	Self-starting Shaded-pole Motor	
Rated Current (A)	0.12/0.10	0.24/0.20
Power (W)	19/14	18/15
Noise Level (dB)	50/52	
Operating Temperature Range	-10°C~+60°C	
Order Code	105760	105770
Outlet Filter Model	FK3322.300 (20601121)	






FK3323.230



FK3323.300


Product Information


Material: ABS
Flammability Rating: UL94 V-0
Protection Class: IP54
Filter Mat Class: G3




Dimension Drawing

Fan Compatible:120x120mm




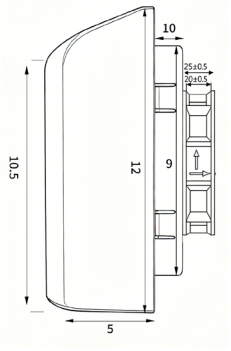

Cutout Dimension

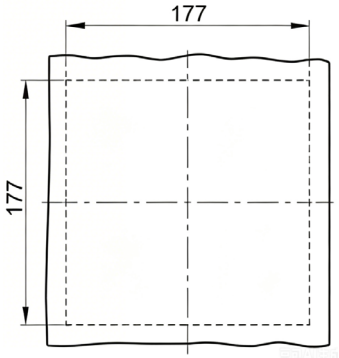

Power Characteristic Curve

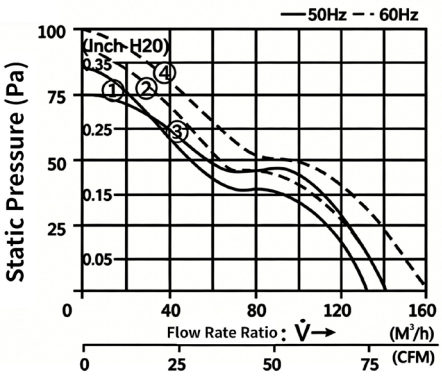


Technical Parameters	FK3323.230	FK3323.115
Axial Fan	ZR-120B-230	ZR-120B-115
Rated Voltage (V)	AC 230	AC 115
Rated Frequency (Hz)	50/60	
Air Flow, Free Blow	55/56m³/h	
Air Flow, with Outlet Filter	1xFK3323.300:30/34m³/h	
Axial Fan	Self-starting Shaded-pole Motor	
Rated Current (A)	0.12/0.10	0.24/0.20
Power (W)	19/14	18/15
Noise Level (dB)	50/52	
Operating Temperature Range	-10°C~+60°C	
Order Code	105780	105790
Outlet Filter Model	FK3323.300 (20601122)	

FK3323D | Fan and Filter




Product Information


Material: ABS
Flammability Rating: UL94 V-0
Protection Class: IP54
Filter Mat Class: G3




Dimension Drawing

Fan Compatible:150x150mm










FK3323D.230




FK3323D.300

Cutout Dimension

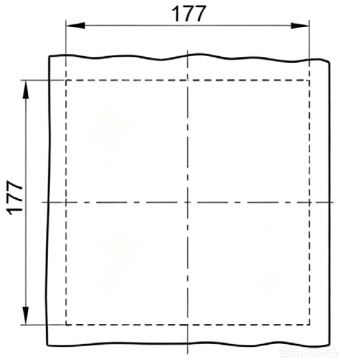

Power Characteristic Curve

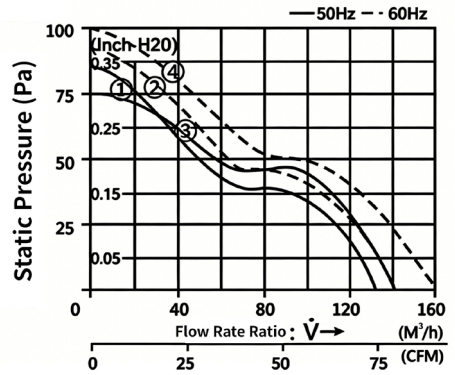

Technical Parameters	FK3323D.230	FK3323D.115
Axial Fan	ZR-150B-230	ZR-150B-115
Rated Voltage (V)	AC 230	AC 115
Rated Frequency (Hz)	50/60	
Air Flow, Free Blow	175/205m³/h	
Air Flow, with Outlet Filter	1xFK3323D.300：70/79m³/h	
Axial Fan	Self-starting Shaded-pole Motor	
Rated Current (A)	0.25	0.45
Power (W)	32/30	
Noise Level (dB)	56	
Operating Temperature Range	-10°C~+60°C	
Order Code	105800	105801
Outlet Filter Model	FK3323D.300 (20601123)	






FK3325.230



FK3325.300


Product Information

Material: ABS
Flammability Rating: UL94 V-0
Protection Class: IP54
Filter Mat Class: G3




Dimension Drawing


Fan Compatible:172x150mm/172x152mm

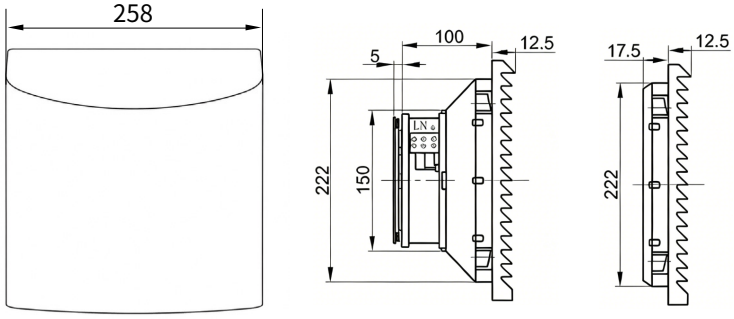

Cutout Dimension

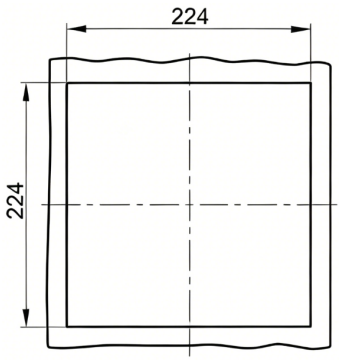

Power Characteristic Curve

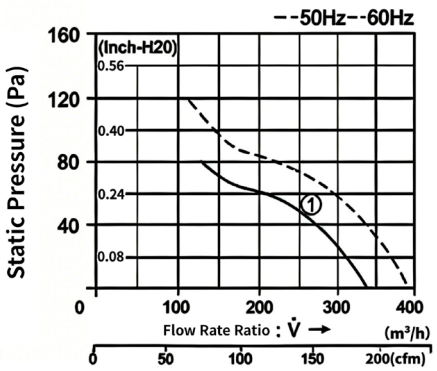

Technical Parameters	FK3325.230	FK3325.115
Axial Fan	ZR-172B-230	ZR-172B-115
Rated Voltage (V)	AC 230	AC 115
Rated Frequency (Hz)	50/60	
Air Flow, Free Blow	230/265m³/h	
Air Flow, with Outlet Filter	1xFK3325.300:115/140m³/h	
Axial Fan	Self-starting Shaded-pole Motor	
Rated Current (A)	0.26/0.2	0.51/0.42
Power (W)	37/33	40/35
Noise Level (dB)	48/52	
Operating Temperature Range	-10°C~+60°C	
Order Code	105811	105821
Outlet Filter Model	TFK3325.300 (20601124)	

FK3325D | Fan and Filter






FK3325D.230



FK3325D.300


Product Information


Material: ABS
Flammability Rating: UL94 V-0
Protection Class: IP54
Filter Mat Class: G3




Dimension Drawing


Fan Compatible:180x180mm/200x200mm








Cutout Dimension

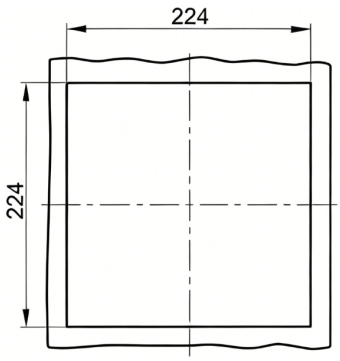

Power Characteristic Curve

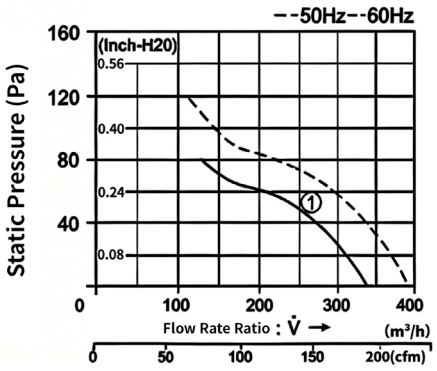

Technical Parameters	FK3325D.230	FK3325D.115
Axial Fan	ZR-180B-230	ZR-180B-115
Rated Voltage (V)	AC 230	AC 115
Rated Frequency (Hz)	50/60	
Air Flow, Free Blow	355/380m³/h	
Air Flow, with Outlet Filter	1xFK3325D.300：178/190m³/h	
Axial Fan	Self-starting Shaded-pole Motor	
Rated Current (A)	0.45	0.9
Power (W)	52/48	
Noise Level (dB)	64	
Operating Temperature Range	-10°C~+55°C	
Order Code	105830	105840
Outlet Filter Model	FK3325D.300 (20601130)	

FK3326 | 风扇及过滤网






FK3326.230



FK3326.300


Product Information


Material: ABS
Flammability Rating: UL94 V-0
Protection Class: IP54
Filter Mat Class: G3




Dimension Drawing

Fan Compatible:225x225mm




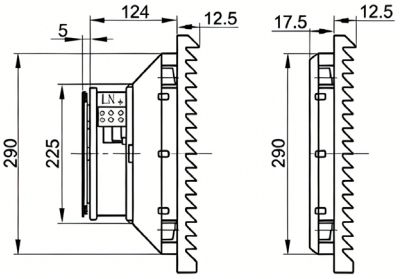

Cutout Dimension



Power Characteristic Curve

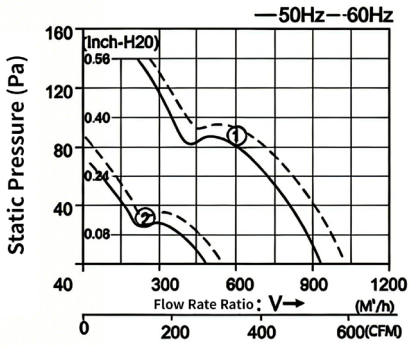

Technical Parameters	FK3326.230	FK3326.115
Axial Fan	ZR-225B-230	ZR-225B-115
Rated Voltage (V)	AC 230	AC 115
Rated Frequency (Hz)	50/60	
Air Flow, Free Blow	500/560m³/h	
Air Flow, with Outlet Filter	1xFK3326.300：244/265m³/h	
Axial Fan	Self-starting Shaded-pole Motor	
Rated Current (A)	0.29/0.33	0.61/0.63
Power (W)	65/77	61/71
Noise Level (dB)	62/64	
Operating Temperature Range	-10°C~+55°C	
Order Code	105850	105851
Outlet Filter Model	FK3326.300 (20601131)	

FK3326D | 风扇及过滤网






FK3326D.230



FK3326D.300


Product Information


Material: ABS
Flammability Rating: UL94 V-0
Protection Class: IP54
Filter Mat Class: G3




Dimension Drawing

Fan Compatible:280x280mm




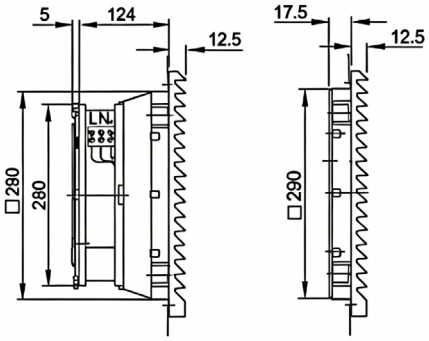

Cutout Dimension



Power Characteristic Curve

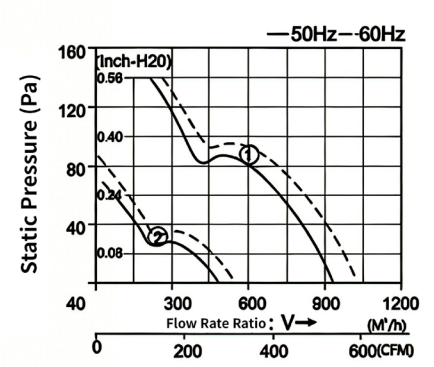

Technical Parameters	FK3326D.230	FK3326D.115
Axial Fan	ZR-280B-230	ZR-280B-115
Rated Voltage (V)	AC 230	AC 115
Rated Frequency (Hz)	50/60	
Air Flow, Free Blow	1200/1350m³/h	1282.5m³/h
Axial Fan	Self-starting Shaded-pole Motor	
Rated Current (A)	0.47/0.59	1.10/1.20
Power (W)	104/135	110/136
Noise Level (dB)	68/70	
Operating Temperature Range	-10°C~+55°C	
Order Code	105860	105861
Outlet Filter Model	FK3326D.300 (20601132)	