NOXT
www.noxtelectric.com

ZR 8025 | Axial Fan


CE




80x80x25 mm

Technical Parameters	
Product Dimension	80x80x25 mm
Center Hole Spacing	71.5±0.3 mm
Weight	220g
Fan Blade Material	PBT
Frame Material	Aluminum Alloy
Lead Wire Length	200-250mm
Motor Type	Sleeve Bearing / Ball Bearing
Operating Temperature Range	-10°C~+60°C
Rotation Direction	Clockwise (CW), viewed from air outlet / label side
Safety Certification	CE

Characteristic Curve

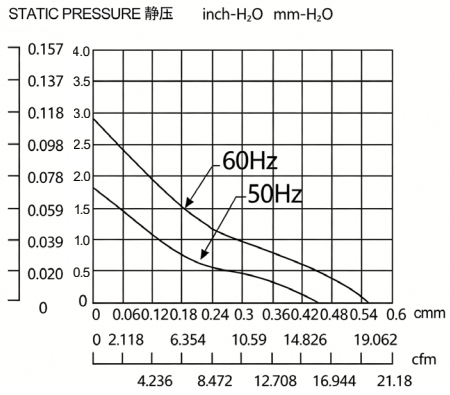

Dimension Drawing

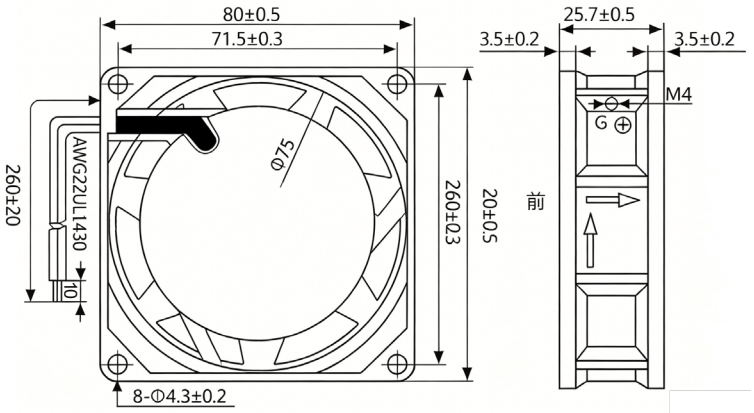

Ordering Information

Order Code	Bearing Type	Voltage (V)	Frequency (Hz)	Current (A)	Power (W)	Speed (RPM)	Air Flow (CFM)	Static Pressure (inch-H_2O)	Noise (dB-A)
20501040	Sleeve Bearing	230	50 /60	0.07	13	2400	21	1.82/2.80	29/33
20501041	Sleeve Bearing	115	50 /60	0.11	13	2400	21	1.82/2.80	29/33
20501050	Ball Bearing	230	50 /60	0.07	13	2400	21	1.82/2.80	29/33
20501051	Ball Bearing	115	50 /60	0.11	13	2400	21	1.82/2.80	29/33

Specifications subject to change without notice. E&OE. End buyer to verify product suitability and associated risks for final application.

NOXT
www.noxtelectric.com

ZR 8038 | Axial Fan


CE




80x80x38 mm

Technical Parameters	
Product Dimension	80x80x38 mm
Center Hole Spacing	71.5±0.3 mm
Weight	220g
Fan Blade Material	PBT
Frame Material	Aluminum Alloy
Lead Wire Length	200-250mm
Motor Type	Sleeve Bearing / Ball Bearing
Operating Temperature Range	-10°C~+60°C
Rotation Direction	Clockwise (CW), viewed from air outlet / label side
Safety Certification	CE

Characteristic Curve

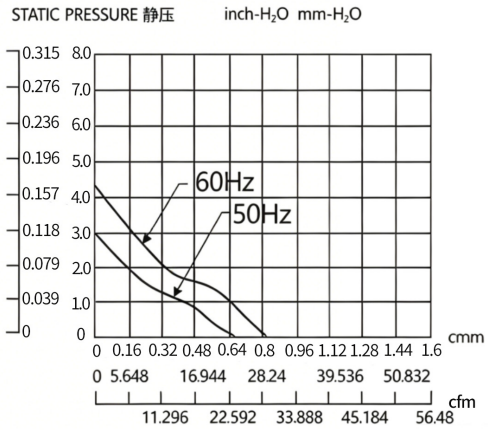

Dimension Drawing

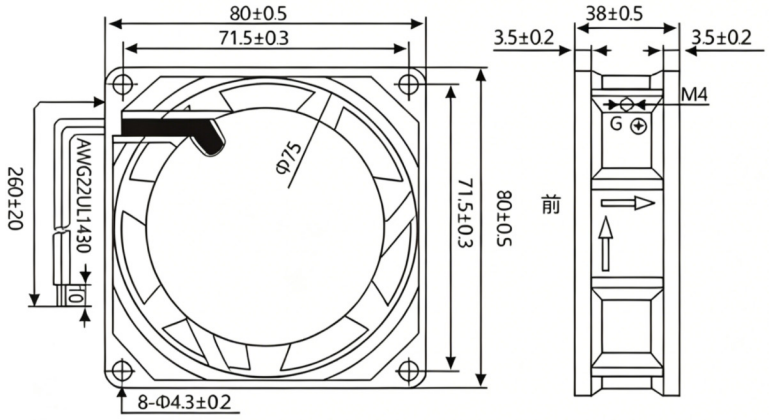

Ordering Information

Order Code	Bearing Type	Voltage (V)	Frequency (Hz)	Current (A)	Power (W)	Speed (RPM)	Air Flow (CFM)	Static Pressure (inch-H_2O)	Noise (dB-A)
20501060	Sleeve Bearing	230	50 /60	0.08	15	2400	35	1.82/2.8	35/38
20501061	Sleeve Bearing	115	50 /60	0.15	15	2400	35	1.82/2.8	35/38
20501070	Ball Bearing	230	50 /60	0.08	15	2400	35	1.82/2.8	35/38
20501071	Ball Bearing	115	50 /60	0.15	15	2400	35	1.82/2.8	35/38

Specifications subject to change without notice. E&OE. End buyer to verify product suitability and associated risks for final application.

NOXT
www.noxtelectric.com

ZR 9225 | Axial Fan


CE




92x92x25 mm

Technical Parameters	
Product Dimension	92x92x25 mm
Center Hole Spacing	82.5±0.3 mm
Weight	235g
Fan Blade Material	PBT
Frame Material	Aluminum Alloy
Lead Wire Length	200-250mm
Motor Type	Sleeve Bearing / Ball Bearing
Operating Temperature Range	-10°C~+60°C
Rotation Direction	Clockwise (CW), viewed from air outlet / label side
Safety Certification	CE

Characteristic Curve

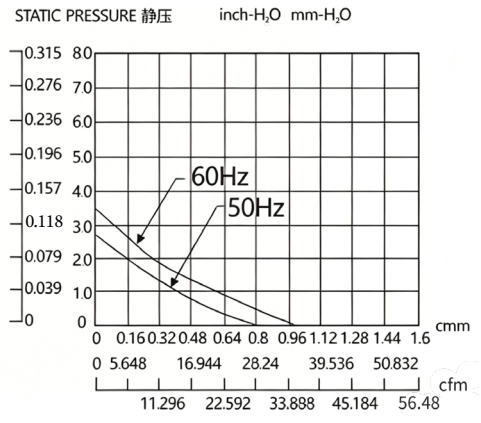

Dimension Drawing

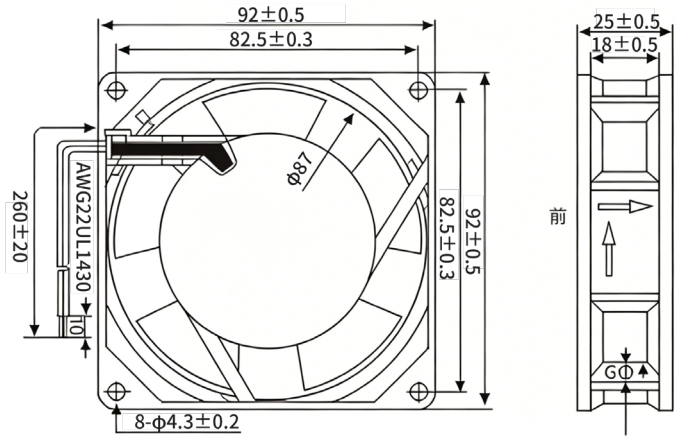

订货信息

订货编码	轴承类型	电压(V)	频率(Hz)	电流(A)	功率(W)	转速(RPM)	风量(CFM)	静压(inch-H_2O)	噪音(dB-A)
20501080	Sleeve Bearing	230	50/60	0.08	15	2400	33	2.6/3.3	35/38
20501081	Sleeve Bearing	115	50/60	0.15	15	2400	33	2.6/3.3	35/38
20501090	Ball Bearing	230	50/60	0.08	15	2400	33	2.6/3.3	35/38
20501091	Ball Bearing	115	50/60	0.15	15	2400	33	2.6/3.3	35/38

Specifications subject to change without notice. E&OE. End buyer to verify product suitability and associated risks for final application.

NOXT
www.noxtelectric.com

ZR 9238 | Axial Fan


CE




92x92x38 mm

Technical Parameters	
Product Dimension	92x92x38 mm
Center Hole Spacing	82.5±0.3 mm
Weight	365g
Fan Blade Material	PBT
Frame Material	Aluminum Alloy
Lead Wire Length	200-250mm
Motor Type	Sleeve Bearing/Ball Bearing
Operating Temperature Range	-10°C~+60°C
Rotation Direction	Clockwise (CW), viewed from air outlet / label side
Safety Certification	CE

Characteristic Curve

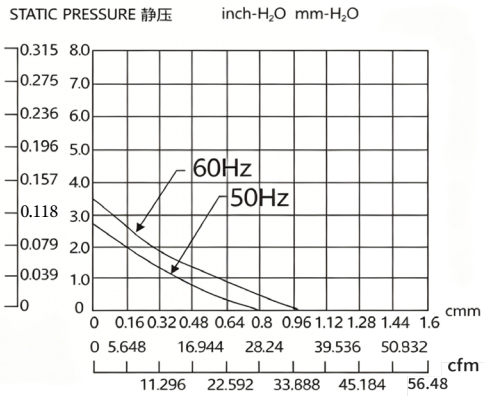

Dimension Drawing

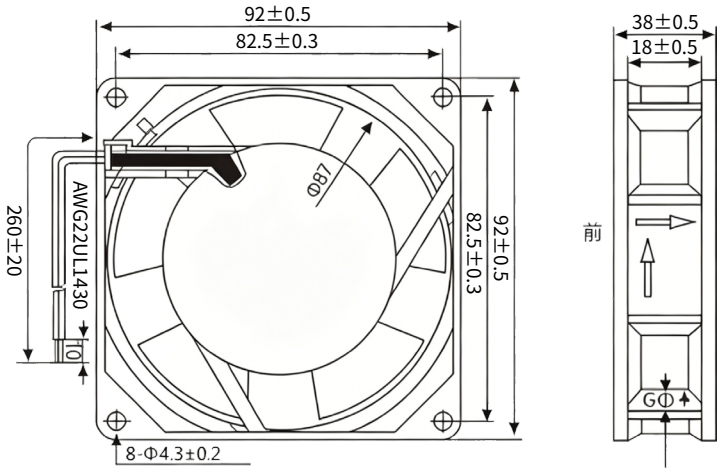

Ordering Information

Order Code	Bearing Type	Voltage (V)	Frequency (Hz)	Current (A)	Power (W)	Speed (RPM)	Air Flow (CFM)	Static Pressure (inch-H_2O)	Noise (dB-A)
20501100	Sleeve Bearing	230	50 /60	0.08	17	2350	39	2.6/3.3	40/43
20501101	Sleeve Bearing	115	50 /60	0.16	17	2350	39	2.6/3.3	40/43
20501110	Ball Bearing	230	50 /60	0.08	17	2350	39	2.6/3.3	40/43
20501111	Ball Bearing	115	50 /60	0.16	17	2350	39	2.6/3.3	40/43

Specifications subject to change without notice. E&OE. End buyer to verify product suitability and associated risks for final application.

www.noxtelectric.com

ZR 12025 | Axial Fan


CE




120x120x25 mm

Technical Parameters	
Product Dimension	120x120x25 mm
Center Hole Spacing	105±0.3 mm
Weight	260g
Fan Blade Material	PBT
Frame Material	Aluminum Alloy
Lead Wire Length	200-250mm
Motor Type	Sleeve Bearing/Ball Bearing
Operating Temperature Range	-10°C~+60°C
Rotation Direction	Clockwise (CW), viewed from air outlet / label side
Safety Certification	CE

Dimension Drawing

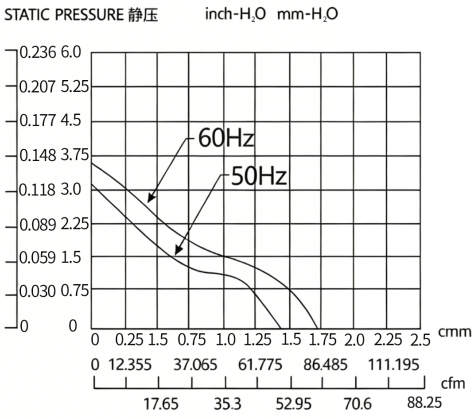

Dimension Drawing

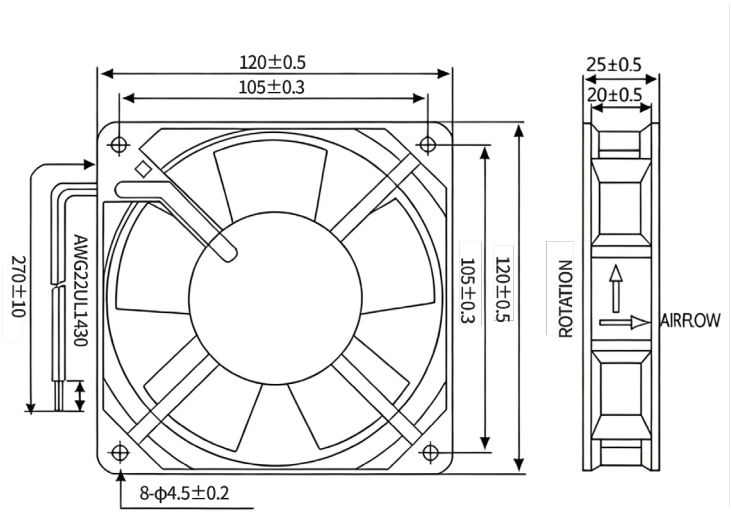

Ordering Information

Order Code	Bearing Type	Voltage (V)	Frequency (Hz)	Current (A)	Power (W)	Speed (RPM)	Air Flow (CFM)	Static Pressure (inch-H_2O)	Noise (dB-A)
20501120	Sleeve Bearing	230	50 /60	0.10	17	2400	65	3.2/3.6	40/43
20501121	Sleeve Bearing	115	50 /60	0.16	17	2400	65	3.2/3.6	40/43
20501130	Ball Bearing	230	50 /60	0.10	17	2400	65	3.2/3.6	40/43
20501131	Ball Bearing	115	50 /60	0.16	17	2400	65	3.2/3.6	40/43

Specifications subject to change without notice. E&OE. End buyer to verify product suitability and associated risks for final application.

NOXT
www.noxtelectric.com

ZR 12038 | Axial Fan


CE




120x120x38 mm

Technical Parameters	
Product Dimension	120x120x38 mm
Center Hole Spacing	105±0.3 mm
Weight	440g
Fan Blade Material	PBT
Frame Material	Aluminum Alloy
Lead Wire Length	200-250mm
Motor Type	Sleeve Bearing/Ball Bearing
Operating Temperature Range	-10°C~+60°C
Rotation Direction	Clockwise (CW), viewed from air outlet / label side
Safety Certification	CE

Dimension Drawing

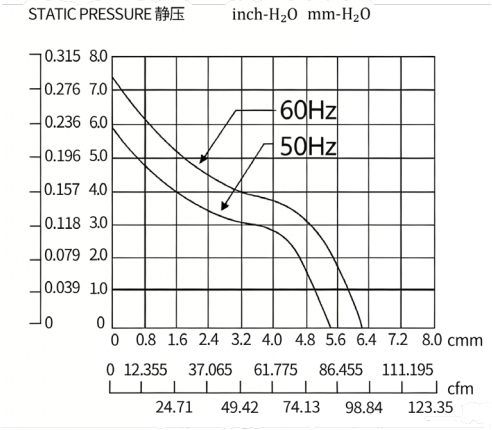

Dimension Drawing

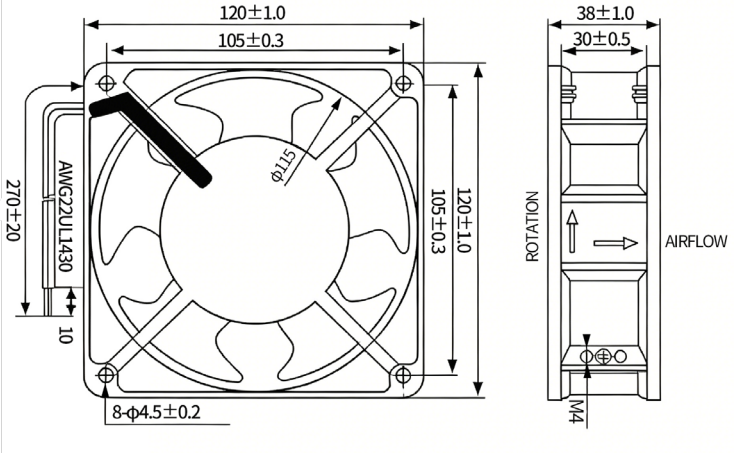

Ordering Information

Order Code	Bearing Type	Voltage (V)	Frequency (Hz)	Current (A)	Power (W)	Speed (RPM)	Air Flow (CFM)	Static Pressure (inch-H_2O)	Noise (dB-A)
20501140	Sleeve Bearing	230	50 /60	0.14	18	2400	79	2.6/3.3	43/46
20501141	Sleeve Bearing	115	50 /60	0.25	18	2400	79	2.6/3.3	43/46
20501150	Ball Bearing	230	50 /60	0.14	18	2400	79	2.6/3.3	43/46
20501151	Ball Bearing	115	50 /60	0.25	18	2400	79	2.6/3.3	43/46

Specifications subject to change without notice. E&OE. End buyer to verify product suitability and associated risks for final application.

NOXT
www.noxtelectric.com

ZR 15050 | Axial Fan


CE




150x150x50 mm

Technical Parameters	
Product Dimension	150x150x50 mm
Center Hole Spacing	122±0.5 mm
Weight	825g
Fan Blade Material	PBT
Frame Material	Aluminum Alloy
Lead Wire Length	200-250mm
Motor Type	Sleeve Bearing/Ball Bearing
Operating Temperature Range	-10°C~+60°C
Rotation Direction	Clockwise (CW), viewed from air outlet / label side
Safety Certification	CE

Dimension Drawing

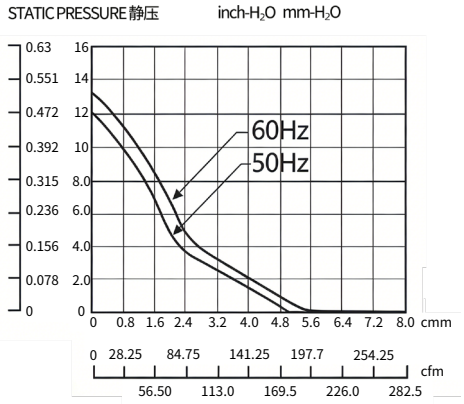

Dimension Drawing

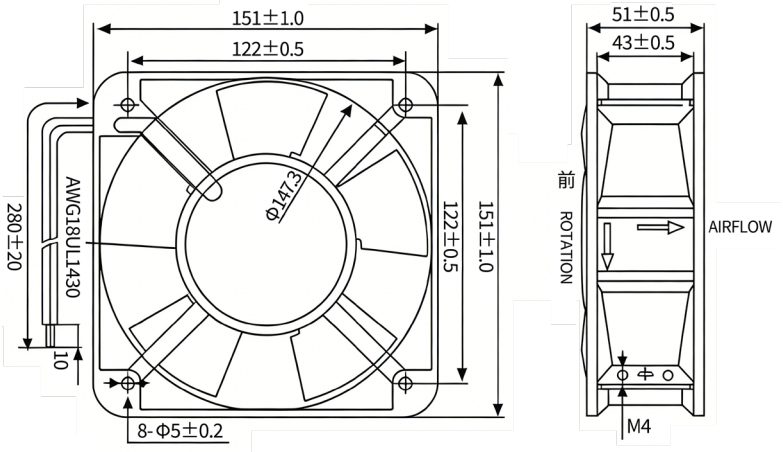

Ordering Information

Order Code	Bearing Type	Voltage (V)	Frequency (Hz)	Current (A)	Power (W)	Speed (RPM)	Air Flow (CFM)	Static Pressure (inch-H_2O)	Noise (dB-A)
20501160	Sleeve Bearing	230	50 /60	0.22	38	2500	176	12.2/13.2	53/55
20501161	Sleeve Bearing	115	50 /60	0.31	38	2500	176	12.2/13.2	53/55
20501170	Ball Bearing	230	50 /60	0.22	38	2400	176	12.2/13.2	53/55
20501171	Ball Bearing	115	50 /60	0.31	38	2400	176	12.2/13.2	53/55

Specifications subject to change without notice. E&OE. End buyer to verify product suitability and associated risks for final application.

NOXT
www.noxtelectric.com

ZR 17251 | Axial Fan


CE




172x152x51 mm

Technical Parameters	
Product Dimension	172x152x51 mm
Center Hole Spacing	162±0. 3mm
Weight	815g
Fan Blade Material	PBT
Frame Material	Aluminum Alloy
Lead Wire Length	200-250mm
Motor Type	Sleeve Bearing/Ball Bearing
Operating Temperature Range	-10°C~+60°C
Rotation Direction	Clockwise (CW), viewed from air outlet / label side
Safety Certification	CE

Dimension Drawing

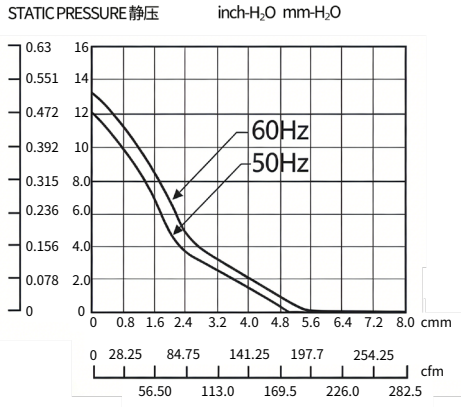

Dimension Drawing

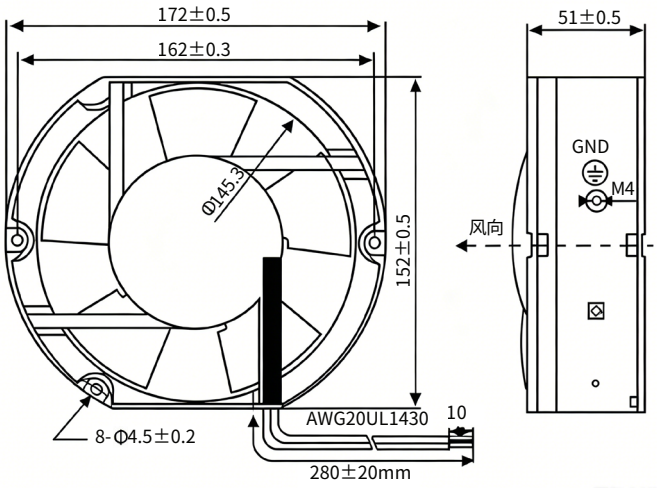

Ordering Information

Order Code	Bearing Type	Voltage (V)	Frequency (Hz)	Current (A)	Power (W)	Speed (RPM)	Air Flow (CFM)	Static Pressure (inch-H_2O)	Noise (dB-A)
20501180	Sleeve Bearing	230	50 /60	0.22	38	2500	176	12.2/13.2	53/55
20501181	Sleeve Bearing	115	50 /60	0.31	38	2500	176	12.2/13.2	53/55
20501190	Ball Bearing	230	50 /60	0.22	38	2500	176	12.2/13.2	53/55
20501191	Ball Bearing	115	50 /60	0.31	38	2500	176	12.2/13.2	53/55

Specifications subject to change without notice. E&OE. End buyer to verify product suitability and associated risks for final application.

NOXT
www.noxtelectric.com

ZR 17255 | Axial Fan


CE



172x150x55 mm

Technical Parameters	
Product Dimension	172x150x55 mm
Center Hole Spacing	162±0.2 mm
Weight	920g
Fan Blade Material	PBT
Frame Material	Aluminum Alloy
Lead Wire Length	200-250mm
Motor Type	Sleeve Bearing/Ball Bearing
Operating Temperature Range	-10°C~+60°C
Rotation Direction	Clockwise (CW), viewed from air outlet / label side
Safety Certification	CE

Dimension Drawing

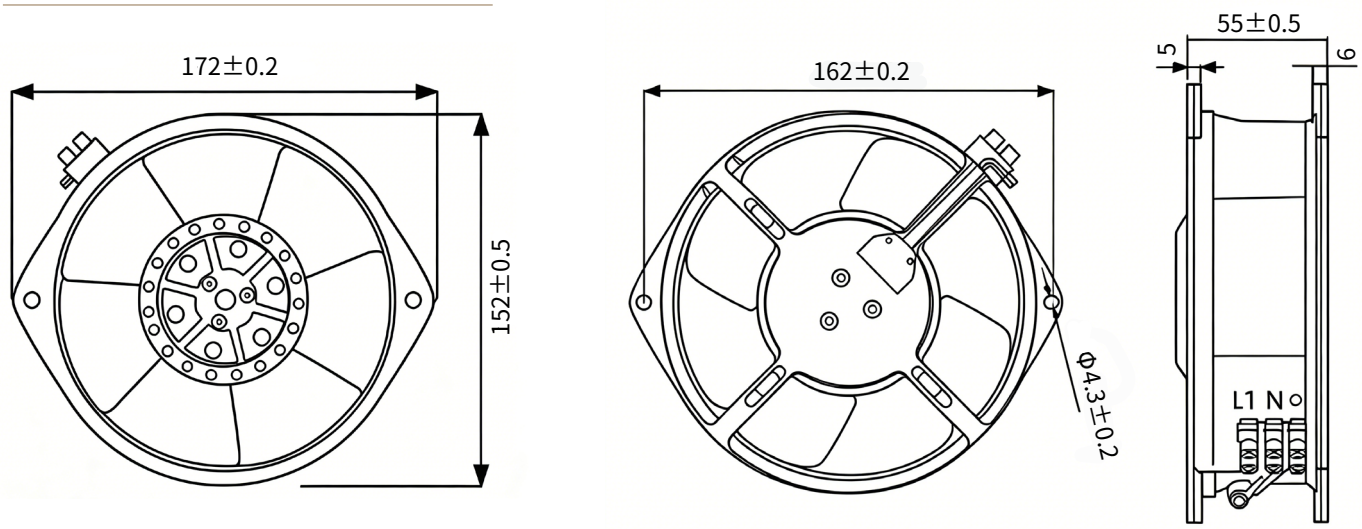

Ordering Information

Order Code	Bearing Type	Voltage (V)	Frequency (Hz)	Current (A)	Power (W)	Speed (RPM)	Air Flow (CFM)	Static Pressure (inch-H_2O)	Noise (dB-A)
20501200	Sleeve Bearing	230	50 /60	0.25	37	2500	189	0.65/0.78	52
20501201	Sleeve Bearing	115	50 /60	0.50	37	2500	189	0.65/0.78	52
20501210	Ball Bearing	230	50 /60	0.25	37	2650	189	0.65/0.78	52
20501211	Ball Bearing	115	50 /60	0.50	37	2650	189	0.65/0.78	52

Specifications subject to change without notice. E&OE. End buyer to verify product suitability and associated risks for final application.

www.noxtelectric.com

ZR 18060 | Axial Fan


CE




180x180x60 mm

Technical Parameters	
Product Dimension	180x180x60 mm
Center Hole Spacing	155±0. 5mm
Weight	1390g
Fan Blade Material	PBT
Frame Material	Aluminum Alloy
Lead Wire Length	200-250mm
Motor Type	Ball Bearing
Operating Temperature Range	-10°C~+60°C
Rotation Direction	Clockwise (CW), viewed from air outlet / label side
Safety Certification	CE

Characteristic Curve

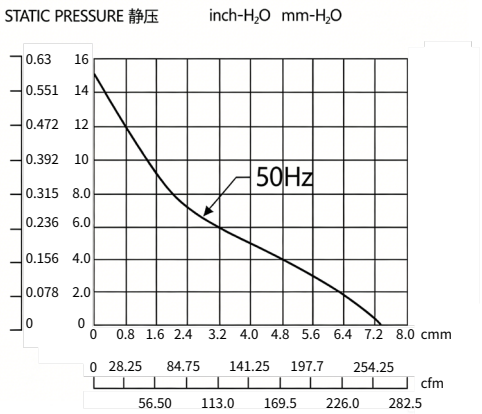

Dimension Drawing

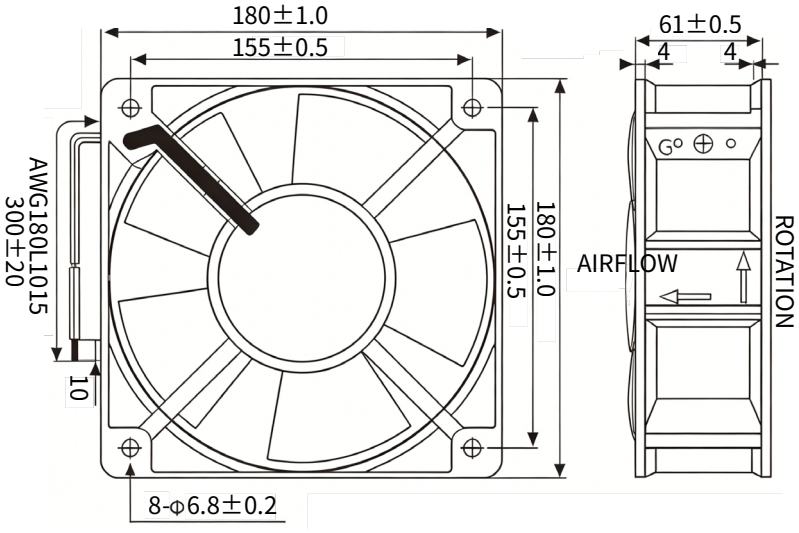

Ordering Information

Order Code	Bearing Type	Voltage (V)	Frequency (Hz)	Current (A)	Power (W)	Speed (RPM)	Air Flow (CFM)	Static Pressure (inch-H_2O)	Noise (dB-A)
20501220	Ball Bearing	230	50 /60	0.35	65	2500	254	15.3	58/62
20501221	Ball Bearing	115	50 /60	0.60	65	2500	254	15.3	58/62

Specifications subject to change without notice. E&OE. End buyer to verify product suitability and associated risks for final application.

NOXT
www.noxtelectric.com

ZR 20060 | Axial Fan


CE




200x200x60 mm

Technical Parameters	
Product Dimension	200x200x60 mm
Center Hole Spacing	166±0. 5mm
Weight	1455g
Fan Blade Material	PBT
Frame Material	Aluminum Alloy
Lead Wire Length	200-250mm
Motor Type	Ball Bearing
Operating Temperature Range	-10°C~+60°C
Rotation Direction	Clockwise (CW), viewed from air outlet / label side
Safety Certification	CE

Characteristic Curve

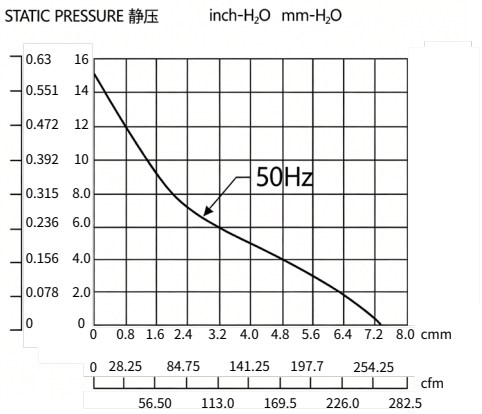

Dimension Drawing

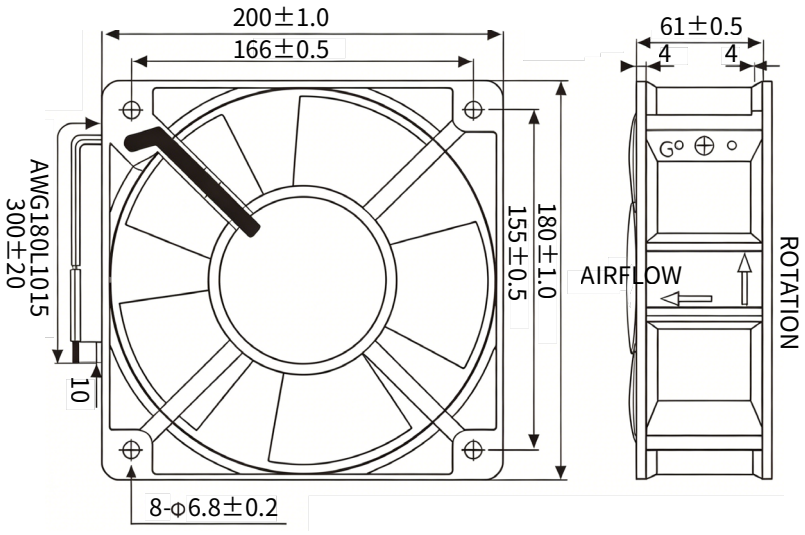

Ordering Information

Order Code	Bearing Type	Voltage (V)	Frequency (Hz)	Current (A)	Power (W)	Speed (RPM)	Air Flow (CFM)	Static Pressure (inch-H_2O)	Noise (dB-A)
20501240	Ball Bearing	230	50 /60	0.35	65	2550	276	15.3	62/64
20501241	Ball Bearing	115	50 /60	0.60	65	2550	276	15.3	62/64

Specifications subject to change without notice. E&OE. End buyer to verify product suitability and associated risks for final application.

NOXT
www.noxtelectric.com

ZR 22060 | Axial Fan


CE




220x60 mm

Technical Parameters	
Product Dimension	220x60 mm
Center Hole Spacing	211±0. 3mm
Weight	1345g
Fan Blade Material	PBT
Frame Material	Aluminum Alloy
Lead Wire Length	200-250mm
Motor Type	Ball Bearing
Operating Temperature Range	-10°C~+60°C
Rotation Direction	Clockwise (CW), viewed from air outlet / label side
Safety Certification	CE

Characteristic Curve

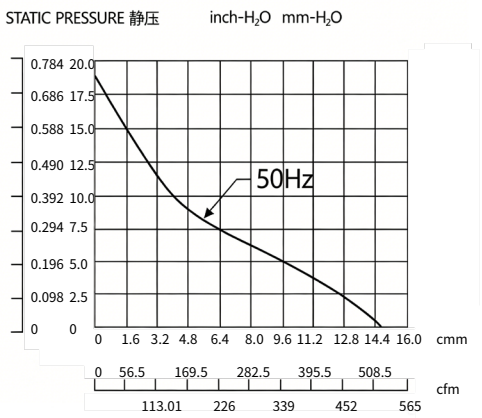

Dimension Drawing

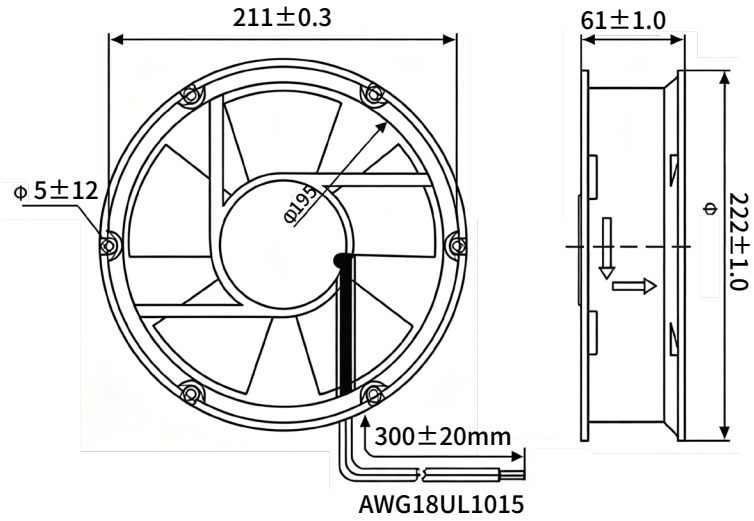

Ordering Information

Order Code	Bearing Type	Voltage (V)	Frequency (Hz)	Current (A)	Power (W)	Speed (RPM)	Air Flow (CFM)	Static Pressure (inch-H_2O)	Noise (dB-A)
20501260	Ball Bearing	230	50 /60	0.35	65	2550	276	15.3	62/64
20501261	Ball Bearing	115	50 /60	0.60	65	2550	276	15.3	62/64

Specifications subject to change without notice. E&OE. End buyer to verify product suitability and associated risks for final application.

NOXT
www.noxtelectric.com

ZR 22580 | Axial Fan


CE



225x225x80 mm

Technical Parameters	
Product Dimension	225x225x80 mm
Center Hole Spacing	211±0. 3mm
Weight	1645g
Fan Blade Material	PBT
Frame Material	Aluminum Alloy
Lead Wire Length	200-250mm
Motor Type	Ball Bearing
Operating Temperature Range	-10°C~+60°C
Rotation Direction	Clockwise (CW), viewed from air outlet / label side
Safety Certification	CE

Dimension Drawing

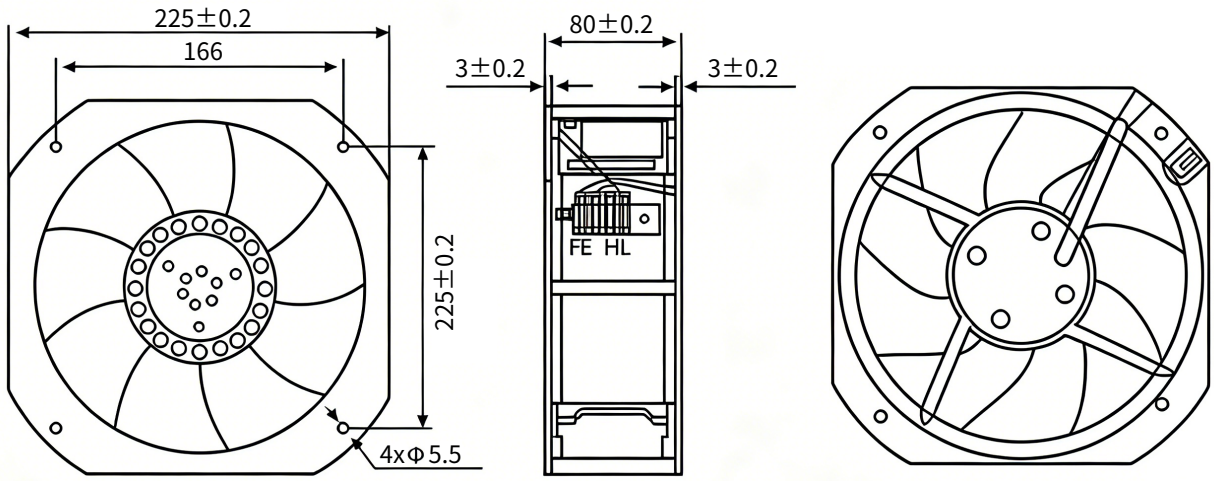

Ordering Information

Order Code	Bearing Type	Voltage (V)	Frequency (Hz)	Current (A)	Power (W)	Speed (RPM)	Air Flow (CFM)	Static Pressure (inch-H_2O)	Noise (dB-A)
20501280	Ball Bearing	230	50	0.45	85	2400	570	2.2μF/450V	65
20501281	Ball Bearing	115	50	0.45	85	2400	570	2.2μF/450V	65

Specifications subject to change without notice. E&OE. End buyer to verify product suitability and associated risks for final application.

NOXT
www.noxtelectric.com

ZR 28080 | Axial Fan


CE



225x225x80 mm

Technical Parameters	
Product Dimension	280x280x80 mm
Center Hole Spacing	209±0. 2mm/135±0. 2mm
Weight	2685g
Fan Blade Material	PBT
Frame Material	Aluminum Alloy
Lead Wire Length	200-250mm
Motor Type	Ball Bearing
Operating Temperature Range	-10°C~+60°C
Rotation Direction	Clockwise (CW), viewed from air outlet / label side
Safety Certification	CE

Dimension Drawing

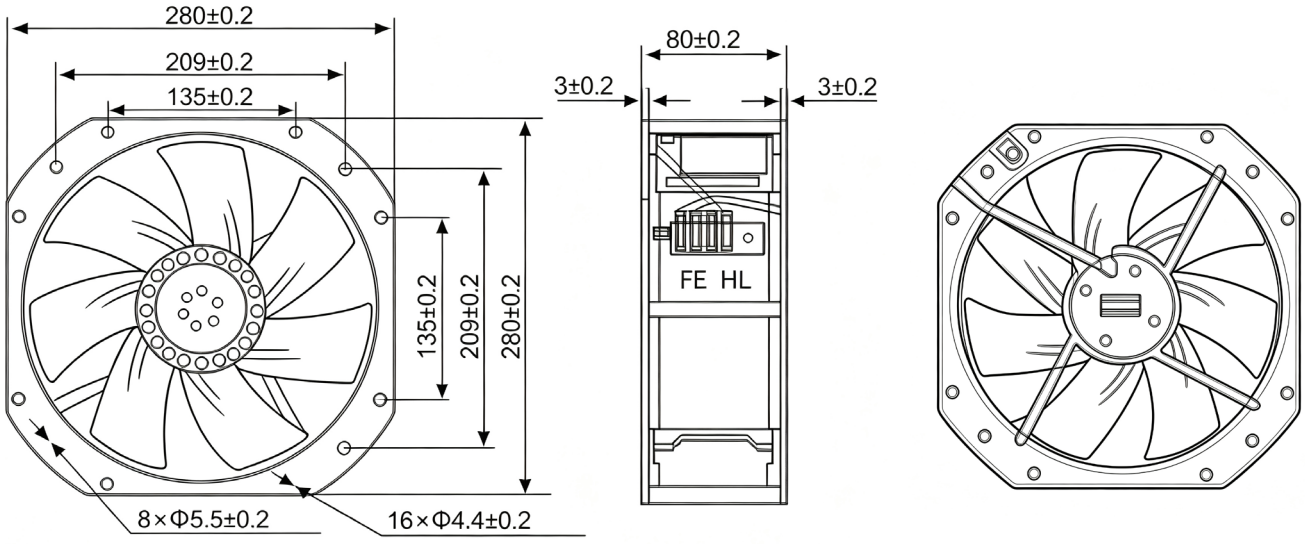

Ordering Information

Order Code	Bearing Type	Voltage (V)	Frequency (Hz)	Current (A)	Power (W)	Speed (RPM)	Air Flow (CFM)	Static Pressure (inch-H_2O)	Noise (dB-A)
20501300	Ball Bearing	230	50	0.52	100	2500	786	2.2μF/450V	72
20501301	Ball Bearing	115	50	0.52	100	2400	786	1.0μF/630V	72

Specifications subject to change without notice. E&OE. End buyer to verify product suitability and associated risks for final application.